





BISECTED ROPE ENTRY

STRAIGHT ROPE ENTRY

DEFLECTION ANGLE, 'A' (°)	MAX ROPE TENSION (KG)
10	3440
15	2300
30	1160
45	780
60	600
90	420

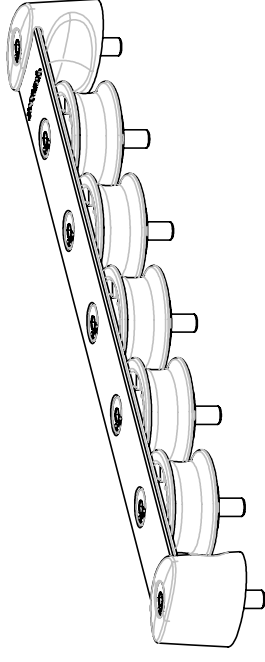

Ø 38 COMPOSITE SHEAVE (T38/5)
ALLOY SHEAVE (T38/5A)

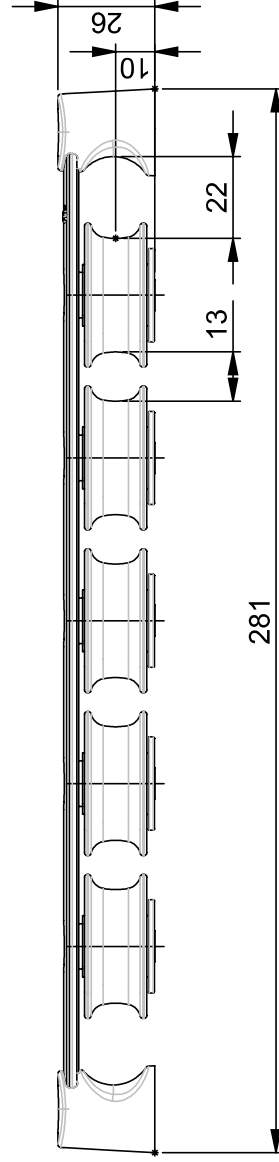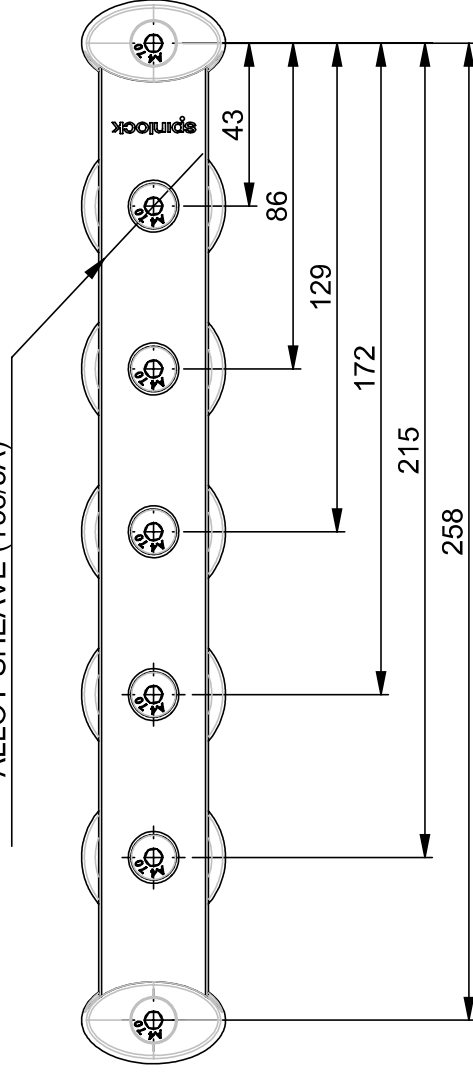

WARNING: IF USING AS DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS BEFORE DRILLING.

COPYRIGHT: THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM
SCALE 1:2
PAGE SIZE A4
DATE MAR 2018

LINE SIZE: 6-12mm
FASTENERS M6 CSK x 7

PRODUCT CODE T38/5
T38/5A

WEIGHT 227g
323g

MAX LOAD 600kg
600kg

MAX LOAD PER UNIT 1500kg
1500kg

T38/5

FOR ANY MORE INFO CONTACT
SPT@SPINLOCK.CO.UK