


Automatic lifeline hook - Length: 91 mm - M6*100

Part #2834

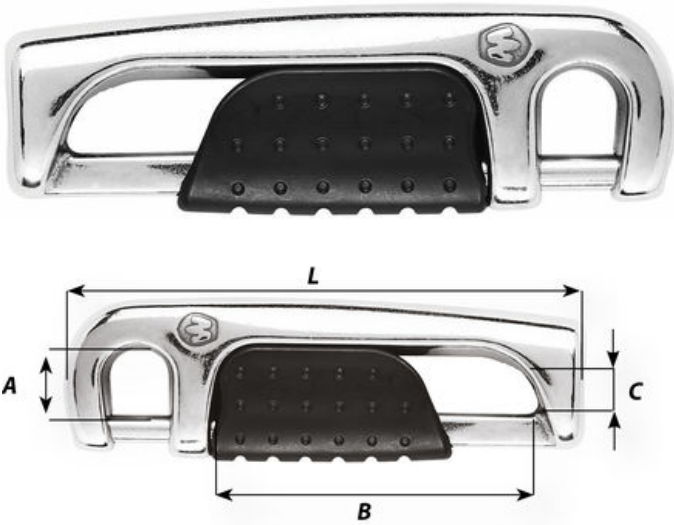

Description

Automatic locking lifeline hook
Only takes one hand to operate
Forged Duplex stainless steel body - composite injection trigger (PBT) - 316L spring and piston
Extremely strong, UV resistant and corrosion free
Compact and lightweight
For M6

Applications

Fermeture des portières

Technical information

Materials	316L stainless steel grade Duplex stainless steel grade
Length (mm)	91
 Working load (kg)	640
Breaking load (kg)	1500
Weight (g)	102
A (mm)	11
B (mm)	55
C (mm)	M6x100

Caption



Working load (WL) : for nautical applications



Working Load Limit (WLL): for industrial applications only.
The safety factor is 5 times the breaking load.
WLL = Breaking load / 5

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.