

## Electric standard toilets

The well proven and popular electric standard toilets with combined pump unit for flushing and wasting . All metal parts and screws are in stainless steel. The base is in impact resistant material. Can be installed either above or below the sea level. A special macerator pump allows the expulsion up to 3.50 m in height. Self priming up to 1,5 mt. vertically. Equipped with seat lid and control panel. Port connections: inlet. 19mm. 3/4" and outlet 25/38mm. 1" & 1" 1/2. Space saving thanks to the possibility of rotating 90 degrees the pump and provided accessibility for servicing

PART. N.	BOWL TYPE	VOLT	AMP	SEAT TYPE	SOFT CLOSE	CONVERSION KIT	DIMENSION IN MM. (width,depth,height) Open=height with seat open	KG
6500000412	SPACE SAVER	12	17	6500000002	YES	5500000712	335X420X345(630)OPEN	11
6500000424	SPACE SAVER	24	8	6500000002	YES	5500000724	335X420X345(630)OPEN	11
6500000712	COMPACT	12	17	6500000001	NO	5500000712	335X420X390(675)OPEN	12
6500000724	COMPACT	24	8	6500000001	NO	5500000724	335X420X390(675)OPEN	12
6700000712	COMPACT	12	17	6500000002	YES	5500000712	335X420X390(675)OPEN	11
6700000724	COMPACT	24	8	6500000002	YES	5500000724	335X420X390(675)OPEN	11
6700000812	COMFORT	12	17	6500000004	YES	5500000712	365X460X385(730)OPEN	12
6700000824	COMFORT	24	8	6500000004	YES	5500000724	365X460X385(730)OPEN	12
6500200912	LAGUNA	12	24	6500000002	YES	5500019112	340X405X410(720)OPEN	18
6500200924	LAGUNA	24	12	6500000002	YES	5500019124	340X405X410(720)OPEN	18
6500002412	LUXURY LOW	12	30	6500000007	YES	5500003812	365X455X385(790)OPEN	20
6500002424	LUXURY LOW	24	15	6500000007	YES	5500003824	365X455X385(790)OPEN	20
6500002612	LUXURY STD	12	30	6500000007	YES	5500003812	365X455X455(860)OPEN	22
6500002624	LUXURY STD	24	16	6500000007	YES	5500003824	365X455X455(860)OPEN	22

All standard toilets are supplied with a one push button flushing for easiness of operation



Electric standard space saver



Electric standard compact



Electric standard comfort



Laguna electric standard



Luxury low



Luxury standard.



## ELECTRIC EVOLUTION CONVERSION KIT:



Converts compact and comfort bowl of most toilets with 4 bolt fixing bowls and bolt centres on a 95 mm (3 3/4") diameter circle such as Matromarine, Jabsco, TMC, Raritan, RM69, Johnson Pump, Theford, Lalizas. Included kit contains all necessary parts, such as stainless steel bolts and washers, hose and gaskets and control panel. Space saving thanks to the possibility of rotating 90 degrees the pump and provided accessibility for servicing

CD:5600000112 12V  
CD:5600000124 24V.



### Conversion kits

Converts compact and comfort bowl of most toilets with 4 bolt fixing bowls and bolt centres on a 95 mm (3 3/4") diameter circle such as Matromarine, Jabsco, TMC, Raritan, RM69, Johnson Pump, Theford, Lalizas. Included kit contains all necessary parts, such as stainless steel bolts and washers, hose and gaskets and in most toilets control panel as well.

### Manual

CD:6100000700



### Electric standard

CD:5500000712 12V.  
CD:5500000724 24V.



### Electric silent for flange bowl


CD:5600000712 12V  
CD:5600000724 24V.



Suit also all deluxe, luxury bowl manufactured before 2012. and toilets having 4 bolt fixing bowls and bolt centres on a 95 mm

### Electric silent new.

CD:550019712-24 12/24V  
for Laguna Bowls.  
CD:550019812-24 12/24V.  
for Luxury/Deluxe bowls STD  
Luxury low versions have another hose connection so always specify bowl type.



## SPARE SEATS:

Compact and comfort version are interchangeable with JABSCO, SPX, TMC, RM69, TMC toilets.

CD:6500000001 wooden seat for space saver, compact and laguna bowls

CD:6500000002 soft close seat for space saver, compact and laguna bowls

CD:6500000004 soft close seat for comfort bowls

CD:6500000007 duroplast soft close seat for luxury bowls

CD:6500000008 Thermosetting top quality material seat with ss hinges for deluxe bowls  
can mount bidet fittings 6500000015

CD:6500000013 Thermosetting soft close top quality material seat with ss hinges for luxury




## VENTED LOOPS:

CD:6000100015 Port Connection 38

CD:6000100013 Port Connection 25

CD:6000100010 Port Connection 19

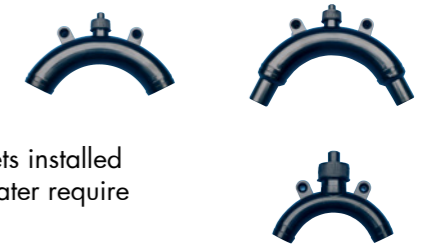

Indispensable component for inlet and discharge pipes of manual and electric toilets installed below the waterline. Manual and electric marine toilets flushed with sea or river water require connections through the hull below water level

## Y-VALVES:

A universal valve to discharge either overboard or into waste tanks designed for long distance control by means of a push-pull cable. It can be used in three ways: 1) the water from the toilet is flushed into the sea or into the waste tank; 2) the water is discharged from the waste tank into the sea by means of a macerator or on the quay by means of a suction pump; 3) the macerator discharges into the sea or on the quay by means of a suction pump. Can be pad-locked.

CD:6000100025  
Port connection 38 mm.



CD:6000200025

Equipped with extra 25 mm straight inlet port and handle extension. Can be operated through bulkhead. 2x Orientable 360 degrees outlet port connections 38 mm

