



## 609 jib reefing

The 609 drum cheeks swivel through 360°, ensuring safe manoeuvres through a smooth and regular feeding of the tiller rope. These cheeks protect the reefing drum efficiently and the round unobtrusive design, combined with recessed screws, allow the free running of the ropes.

Reefing drum features highly resistant stainless steel and Delrin® ball bearings. Halyard swivel features Torton® and Delrin® ball bearings which enhances the overall performance and increases the mechanical resistance. Chainplates width is adjustable.



6-9 m

609 JIB REEFING : sailboats 6 to 9 m (20 to 30 ft)				
Model	609-S	609-S	609-T	609-T
Mounting version	CHAINPLATES	TURNBUCKLE	CHAINPLATES	TURNBUCKLE
Reference	<b>58202</b>	<b>58203</b>	<b>58207</b>	<b>58208</b>
Forestay diameter	4 - 7 mm	4 - 7 mm	4 - 7 mm	4 - 7 mm
Supplied complete for forestay :				
• chainplates version	9.40 m	-	8.95 m	-
• turnbuckle version	-	9.55 m	-	9.10 m
Max. headsail size	25 m <sup>2</sup>	25 m <sup>2</sup>	25 m <sup>2</sup>	25 m <sup>2</sup>
Luffrope Ø, finished	6.5 mm	6.5 mm	5 mm	5 mm
Drum sheet capacity	13 m, Ø 6 mm	13 m, Ø 6 mm	13 m, Ø 6 mm	13 m, Ø 6 mm


Halyard swivel common to 609 and 811



## 811 jib reefing

The 811 drum cheeks swivel through 360°, ensuring safe manoeuvres through a regular feeding of the tiller rope. The drum core is manufactured from highly resistant aluminium combining performance and lightweight features.

Drum and halyard swivel are equipped with Torton® and Delrin® ball bearings for increased performance and mechanical resistance. 811 model comes as standard with adjustable chain plates, allowing both mounting possibilities (chainplates or turnbuckle).

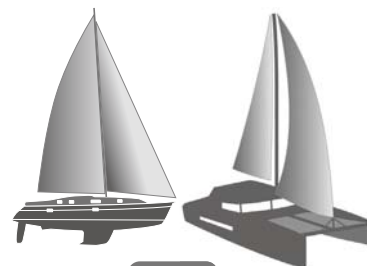

8-11 m

811 JIB REEFING : sailboats 8 to 11 m (26 to 36 ft)		
Model	811-S	811-T
Reference	<b>58204</b>	<b>58209</b>
Forestay diameter	4 - 7 mm	4 - 7 mm
Supplied complete for forestay :	11.20 m	11.40 m
Max. headsail size	35 m <sup>2</sup>	35 m <sup>2</sup>
Luffrope Ø, finished	6.5 mm	5 mm
Drum sheet capacity	17.5 m, Ø 8 mm	17.5 m, Ø 8 mm

Delrin® is a registered trademark of Dupont Polymers. Torton® is a registered trademark of Solway.

## Additional packages

	Description	Reference	406 S	406 T	609 S	609 T	811 S	811 T
<b>Spar package</b>	1.5 m. Includes : 1 alloy spar, 1 plastic spar, 1 quick-coupling sleeve with screws	<b>26901</b>	✓	-	✓	-	✓	-
	2.15 m. Includes : 1 alloy spar, 1 quick-coupling sleeve with screws	<b>26902</b>	-	✓	-	✓	-	✓
<b>Blocks and sheets package</b>	Includes : 12.50 m pre-stretched sheet Ø 4 mm, ref. 48116; 3 blocks ref. 10589 for stanchion Ø 25 mm	<b>17069</b>	✓	✓	-	-	-	-
	Includes : 20 m pre-stretched sheet Ø 6 mm, ref. 51244; 4 blocks ref. 10589 for stanchion Ø 25 mm	<b>17071</b>	-	-	✓	✓	✓	✓

