



PART. N.	MOD.	VOLT	AMP	CANDLE-POWER	RANGE AT 1 LUX	SPARE BULB	REMOTE CONTROL	DOUBLE STATION	LAMP
700010112	wireless LED	12	4	170000	320 meters	7000100012	7000000110	7000000108	LED
700010124	wireless LED	24	2	170000	320 meters	7000100024	7000000110	7000000108	LED
700000112	wired LED	12	4	170000	320 meters	7000100012	7000000112	7100000112	LED
700000124	wired LED	24	2	170000	320 meters	7000100024	7200000124	7100000124	LED
700010212	wireless H4	12	8	125000	250 meters	7000100212	7000000110	7000000108	HALOGEN
700010224	wireless H4	24	4	125000	250 meters	7000100224	7000000110	7000000108	HALOGEN
700000212	wired H4	12	8	125000	250 meters	7000100212	7000000112	7100000112	HALOGEN
700000224	wired H4	24	4	125000	250 meters	7000100224	7000000124	7100000124	HALOGEN

Double spotlight: Two sealed beams 5" with filament light allowing to enjoy always of a very luminous ray on each light, both if the light shaft is directed upwards and also when it is oriented down. Easy mounting thanks to the fitted fast connections.

Manual version with handle rotation 340 degrees, Same characteristics of the electrical single version.

Flood Light: Manufactured in stainless steel. Sealed beam bulb No remote control, No extension lead.

All electric spotlights can be supplied with an extra extension lead (4 mt. long) upon request




PART. N.	MOD.	VOLT	AMP	CANDLE-POWER	RANGE AT 1 LUX	SPARE BULB	REMOTE CONTROL	DOUBLE STATION	PIC.
700000001	manual H.100 W,	12	5	125000	262 meters	7000001012	NO	NO	A
700000002	manual H.100 W,	24	3	125000	262 meters	7000001024	NO	NO	A
7100000012	electric H.2X55W.	12	9	130000	262 meters	7100001312	7200000112	7200100112	B
7100000024	electric H.2X55W.	24	6,5	130000	262 meters	7100001324	7200000124	7200100112	B
7200100012	xenon 55 W.	12	8	600000	400 meters	7200101012	7200000112	7200100112	C
7200100024	xenon 55 W.	24	4	600000	400 meters	7200101024	7200000124	7200100124	C
7200000012	halogen 100 W.7"	12	8	150000	262 meters	7200001012	7000000112	7100000112	C
7200000024	halogen 100 W.7"	24	4	150000	262 meters	7200001024	7000000124	7100000124	C
7000000003	floodlight H. 55 W	12	3	60000	100 meters	NO	NO	NO	D
7000000004	floodlight H. 55 W.	24	1,5	60000	100 meters	NO	NO	NO	D

Wireless panel: New wireless conversion remote control equipped in the new series of "searchlight pro" wireless. Plug and play with all matromarine versions wired old and new.

CD. 7000000110 complete wireless remote panel with the wireless black box converter
Can pair till 5 spare wireless panel.

- * Handheld & Dashmount
- * Receiver and transmitter included
- * Waterproof housing
- * Function: 4 Channel Wireless Remote Control RF 433.92 Mhz
- * Working temperature: 0 to +70

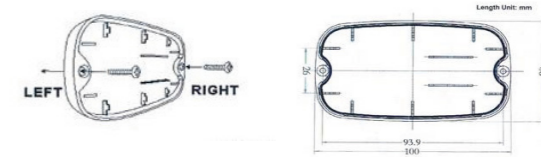

CD. 7000000108 Spare panel or double station for wireless black box.



FOOT SWITCH

Waterproof and suitable to any type of solenoid, universal 12 or 24 Volt. Available in 2 different colours: black or white

- CD. 4500000002 Down
- CD. 4500000003 Up
- CD. 4500000022 Down WHITE
- CD. 4500000033 Up WHITE



DIMENSIONS : diameter 73 x 13 mm

POWER TRIM

It handles of a new concept of trim tab system, consisting of a revolutionary electro-mechanical movement. It is powerful, precise, trouble-free, and, contrarily to the hydraulic mode, it doesn't need a maintenance service or an expensive installation.

Shaft made of stainless steel and nylon glass fiber. Body without any hydraulic tube. Equipped with stainless steel hinge swivel. Possibility of turning at 180° without problems. The stern mounting plates and the flaps are interchangeable with Bennett cylinders.

TRIM TABS

Designed to improve the boat performance, these trim tabs reduce fuel consumption and improve stability in trimming the boats. Manufactured in 304 stainless steel, they are easy to fit and to adjust, and can be mounted on different sizes of boats, according to the engine power.

Made of stainless steel, model fitted with 2.5 mm thickness and special swivelling hinge; the flap can rotate 180° without forcing or breaking the transom bracket. Can be mounted with our electro-mechanical cylinders or use the Bennett hydraulic models.

- CD 3000000812 CYLINDER 12 V.
- CD 3000000924 CYLINDER PAIR 24 V.

- CD 3000000912 CYLINDER PAIR 12 V.
- CD 3000000911 CONTROL TRIM



- CD 3100000912 ELECTRIM 9 x 12"
- CD 3000000916 ELECTRIM 9 x 16"
- CD 3000000922 ELECTRIM 9 x 22"

- 30x23 cm boat size: 4/4.5 mt.
- 40x23 cm boat size: 4,5/5mt
- 55x23 cm boat size 5/6 mt."

