

ZEFIRO

Waste Water Tanks

ZEFIRO line of vertical waste water tanks is made of high-density polyethylene material in brown colour. Polyethylene material is used to prevent any waste odors. These tanks are designed with a gravity discharge technology that allows easier unloading of the tank without using a pump, when installation is carried out at more than 0.5 m above the waterline. Can be mounted on a bulkhead of the boat, saving space and time. The line consists of two models with capacity of 40L and 60L, complying with international standards and can safely store waste water from toilets until they can be discarded safely. All contain 1 inlet and 2 outlets of Ø 38 mm - G 1 1/2" and one vent of Ø 25 mm - G 3/4". They have an inspection hatch of Ø 127 mm, that can be removed for cleaning purposes. Contain a plate compatible with VDO standard senders and are compatible with diaphragm pumps and macerators (12 or 24 V).

Available customised solutions (colour or dimensions) upon request & sufficient quantities.

Gauges



Manufactured in accordance with ISO 8099.


TANKS

Use	Code	Capacity (L)	L1 (mm)	L2 (mm)	W (mm)	H (mm)	H1 (mm)	Hole Ø A (mm)	Sensor (Optional)
Waste Water Tank	196881	40	400	302	250	493,7	540	133,5	196909
	196882	60	400	302	250	703,7	750,3	133,5	196910



240-33 Ohm

Installation Example

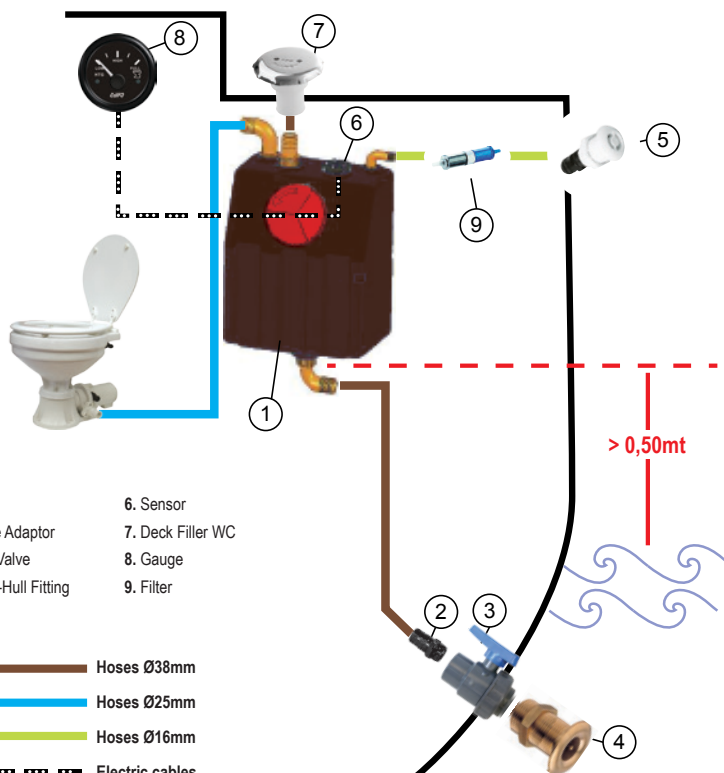

- 1. Tank
- 2. Hose Adaptor
- 3. Ball Valve
- 4. Thru-Hull Fitting
- 5. Vent
- 6. Sensor
- 7. Deck Filler WC
- 8. Gauge
- 9. Filter

- Hoses Ø38mm
- Hoses Ø25mm
- Hoses Ø16mm
- - - - Electric cables

